





1: Take out the plastic fixtures

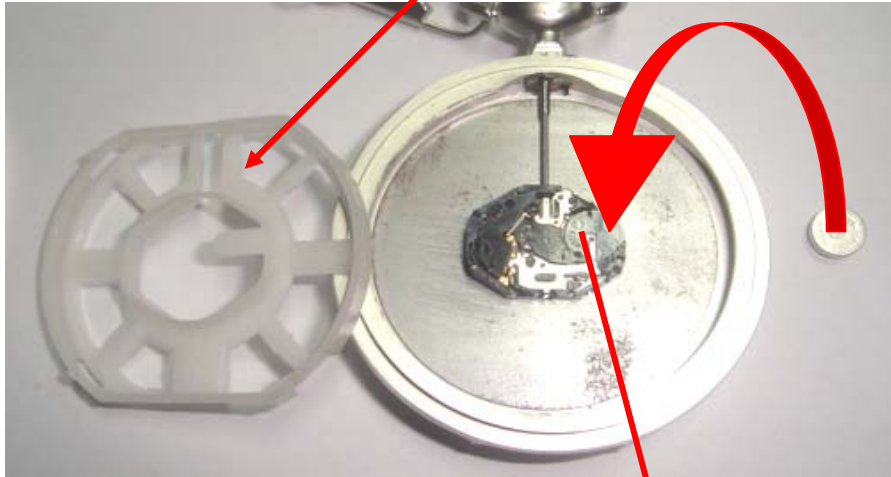

2: Put the battery inside the hole. "+" anode is Upward

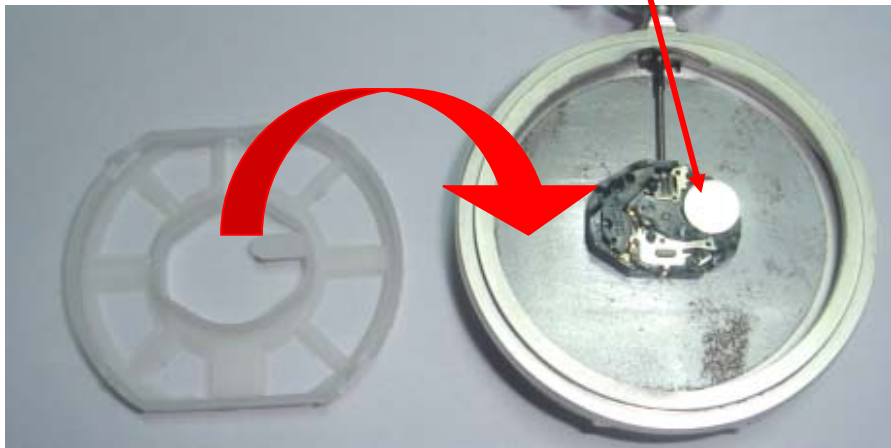

3: Replace the plastic fixtures

4: Replace the back plate

